TECHNICAL DATA SHEET

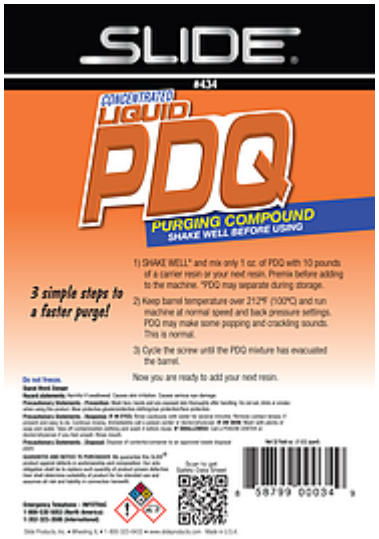

Portable PDQ Purging Compound (50 bags/case)

43401

Product Description

P.D.Q. works with the carrier resin to remove all thermoplastics, and is effective for resin-to-resin and color-to-color changes. It requires no soaking, maximizing production up-time and eliminates the need to keep cracked acrylic purging resin inventory. P.D.Q. lets you purge quickly, easily and safely, and at a fraction of the cost of conventional purges for injection, extrusion or blow molding. Just toss the pre-measured packet in the hopper with your carrier resin and the packet will dissolve during the purge.

Applications	Purging Compoud
Shelf Life	Three years from Date of Manufacture (as found on the bottom of each can and shipping box)
Unit Package Description	package of 50 1-ounce packets
Generic Description	Purging Compound
Net Weight Fill	1 net ounce per bag
UPC Code	none
Appearance	Off-white Liquid
Odor	Slight Amonia
Flash Point F	None
Flash Point C	None
Base Type	Water
Evaporation Rate	N/A
HMIS Rating	Not Determined
DOT Proper Shipping Name	Not Regulated, Cleaning Compounds, NOI
Removal	N/A
Units Per Case	50
Case Weight (lbs)	5
Working Temperature F	212 to 450 degrees
Working Temperature C	100 to 232 degrees
Propellant	N/A
NFPA Aerosol Flammability Level	N/A