


## TECHNICAL DATA SHEET

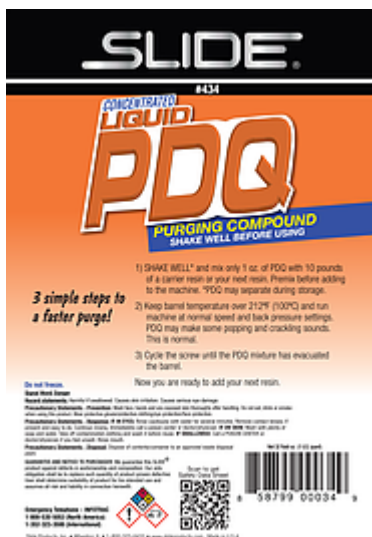

### Portable PDQ Purging Compound (50 bags/case) 43401

#### Product Description

P.D.Q. works with the carrier resin to remove all thermoplastics, and is effective for resin-to-resin and color-to-color changes. It requires no soaking, maximizing production up-time and eliminates the need to keep cracked acrylic purging resin inventory. P.D.Q. lets you purge quickly, easily and safely, and at a fraction of the cost of conventional purges for injection, extrusion or blow molding. Just toss the pre-measured packet in the hopper with your carrier resin and the packet will dissolve during the purge.

#### Applications

Purging Compound

#### Unit Package Description

package of 50 1-ounce packets

#### Generic Description

Purging Compound

#### Net Weight Fill

1 net ounce per bag

#### UPC Code

none

#### Appearance

Off-white Liquid

#### Odor

Slight Amonia

#### Flash Point F

None

#### Flash Point C

None

#### Base Type

Water

#### Evaporation Rate

N/A

#### HMIS Rating

Not Determined

#### DOT Proper Shipping Name

Not Regulated, Cleaning Compounds, NOI

#### Removal

N/A

#### Units Per Case

50

#### Case Weight (lbs)

5

#### Working Temperature F

212 to 450 degrees

#### Working Temperature C

100 to 232 degrees

#### Propellant

N/A

#### NFPA Aerosol Flammability Level

N/A

