


TECHNICAL DATA SHEET

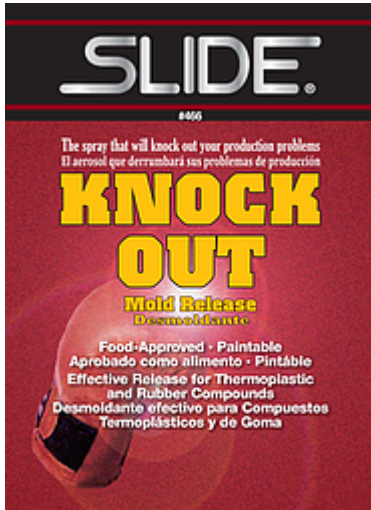

Knock Out Mold Release Bulk/Liquid 46601PB, 46605PB, 46655PB

Product Description

Knock Out is the mold release that works where others have failed. It gets "sticky parts" cleanly out of the mold and is approved for indirect food contact. Knock Out Mold Release imparts a light, dry coating that is amazingly effective, working for several cycles without re-application. Paintable formulation.

Applications

Mold Release

Unit Package Description

1, 5 and 55-gallon containers

Generic Description

Paintable Mold Release

Approx. Net Weight Fill per Gal.

6 pounds

Net Weight Fill

1 - 55 gallons

Appearance

Clear Oily Colorless Liquid

Odor

Mild, Petroleum-like

Flash Point F

25 degrees

Flash Point C

Negative 4 degrees

Base Type

Propylene Glycol

Evaporation Rate

Fast

HMIS Rating

2, 3, 0, X

DOT Proper Shipping Name

UN1206, Proper Shipping Name - Heptanes Solution, Hazard Class - 3, Packing Group - II

VOC % (Federal)

96.67

VOC g/L (Federal)

683.99

VOC lbs./Gal (Federal)

5.71

Removal

Remove with organic or hydrocarbon solvents

Food Safety Citation (CFR)

21CFR 178.3570

Units Per Case

1

Case Weight (lbs)

Various

Working Temperature F

32 to 450 degrees

Working Temperature C

0 to 232 degrees

Specific Gravity

0.698

