


# TECHNICAL DATA SHEET

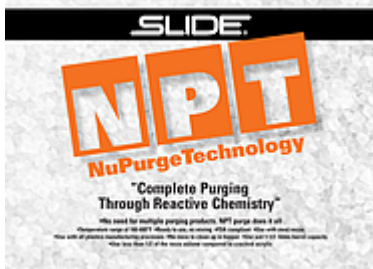

## NPT NuPurge Technology Purging Compound 451-05, 451-45, 451-1300

### Product Description

NPT NuPurge Technology solves the major problem of removing stubborn residue between color or resin changes. It consists of concentrated purge pellets that react chemically to heat, quickly and effectively cleaning machinery without extra soak time, excess downtime or lost productivity. The resulting purge is so effective that even resin deposits accumulated over long periods are often removed the first time N.P.T is used. While it works well with most resins, it is not recommended for use with acetal or Delrin®. All ingredients are GRAS rated so it is safe to use for food packaging applications.



<b>Applications</b>	Purging Compound
<b>Unit Package Description</b>	49 and 1,400 pound boxes
<b>Generic Description</b>	Purging Compound
<b>Net Weight Fill</b>	45 & 1,300 pounds
<b>UPC Code</b>	858799000516
<b>Appearance</b>	Resin Pellet
<b>Odor</b>	Sweet
<b>Flash Point F</b>	>750 degrees
<b>Flash Point C</b>	>400 degrees
<b>Base Type</b>	Resin
<b>Evaporation Rate</b>	N/A
<b>HMIS Rating</b>	0, 0, 0, None
<b>DOT Proper Shipping Name</b>	Not Regulated, Granules, NOI
<b>Removal</b>	N/A
<b>Units Per Case</b>	45 & 1,000 pounds
<b>Case Weight (lbs)</b>	45 / 1,300
<b>Working Temperature F</b>	160 to 600 degrees
<b>Working Temperature C</b>	71 to 315 degrees
<b>Propellant</b>	N/A
<b>NFPA Aerosol Flammability Level</b>	N/A